
XQ SERIES



DVR - XQ series



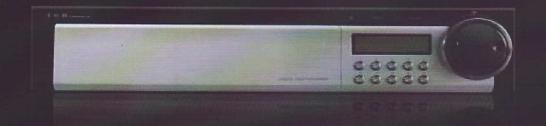

Main Features

- **√ MPEG4 Compression**
- √ High performance (400 fps Displaying / 400 fps Recording)
- √ Max 3 HDD X 750GB
- **√ User-Friendly GUI**

Function

· Powerful Networking

Full support for remote functionality via DHCP, DDNS, 10/100 Base-T Ethernet, Static/Dynamic IP Networking Time synchronization using Industrial standard protocol (NTP), Email notification, Callback Support.

· Real-time Live Monitoring

Alarm Handling (Motion, Video Loss, Sensor, Event Control), 2 Spot Monitor support.

· User friendly video search

Support 16 channels Playback / Simultaneous / Smart / Event (Motion, Sensor) / Panorama Search. Save a screenshot or an AVI(1CH)

Multiple Functions

Firmware upgrade via USB or CD-RW or Network Fully support the multiple language (Default: English)

Remote System Monitoring

Alarm Handling like Motion, Video Loss, Sensor, Event (Popup, Sound) Control Full support for CMS, Callback Agent, PDA Viewer, Web viewer



Setup mode



Live mode



Search mode

Specification

	XQ400	XQ900	XQ1600
Camera Inputs	4CH	9CH	16CH
Camera outputs	VGA, S-Video,Loopout, 2 Spot		
Compression	MPEG-4		
Recording Frame	100fps	200fps	400fps
Display Frame	100fps	200fps	400fps
os	Embedded Linux		
Quadplex	Live, Recording, Playback, Networking, Backup at the same time		
Sensor in / Alarm out	4in / 4out	8in / 4out	16in / 4out
Audio	4 in / 1 out (G.723 Compression)		
Display Split	1,4	1,4,9	1,4,9,16
Digital Zoom	2X		
System Control	Front Buttons, Jog shuttle and IR Remote Controller, Mouse Supported.		
Features	Features		
Recording Modes	Normal, Event, Always + Event, Sensor, Schedule		
Recording Quality	Lowest, Low, Normal, High, Highest (5 steps)		
Recording Resolution	720x480, 720x240, 360x240		
Search Mode	Date & Time, Calendar, Event(Motion, Sensor), First & Last		
PTZ Control	Pan/Tilt, Zoom, Focus, Iris, Preset		
Backup	CD/DVD-RW, 3 USB(2.0), Removable HDD,Memory Stick		
Control Unit	IR Remote Controller, Mouse Supported.		
Storage	3EA x HDD		
Upgrade	USB or Network (Firmup software)		
Network	/100M Base-T Ethernet, LAN, WAN, Web, DHCP/DDNS, Static/Dynamic		
Remote Monitoring S/W	CMS, Callback Agent, Web viewer, PDA viewer		
Hardware	Hardware		
Power	115/230VAC, 60/50Hz, 6/3A		
Dimention	435(W) X 425(D) X 87(H) mm		
Weight	About 7KGS without CDRW and HDD		